

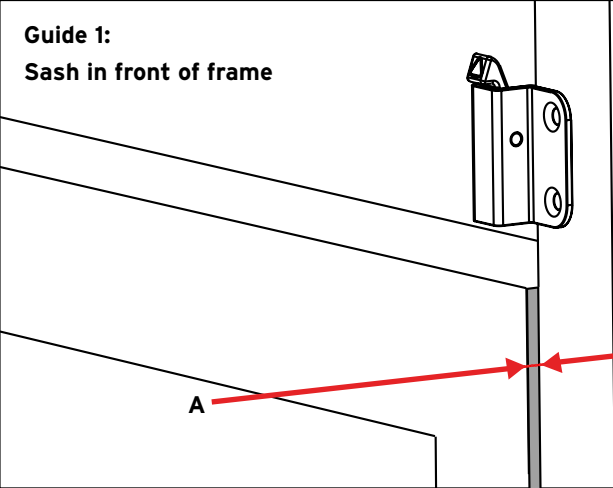
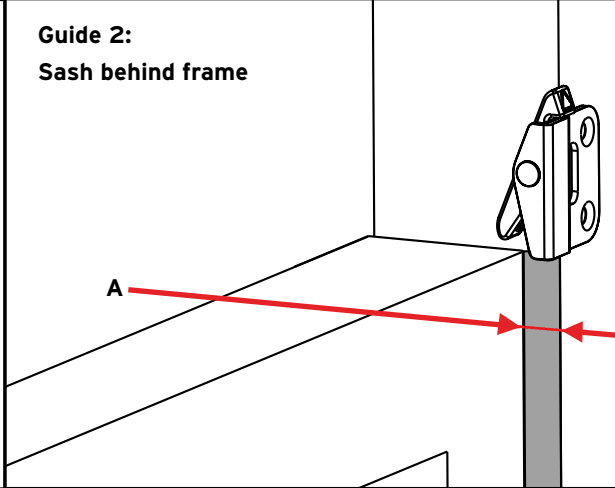


# Reverse Retrofit

## Measuring Chart

[angel-ventlock.com](http://angel-ventlock.com)

Notes: Item supplied in matched pairs, right hand side shown below.

<b>Guide 1:</b> <b>Sash in front of frame</b> 		<b>Guide 2:</b> <b>Sash behind frame</b> 	
Window Location	Distance from A to B	Window Location	Distance from A to B

# **IMPORTANT:**

Because of the function of these devices (Child fall prevention), it is absolutely imperative the correct device is selected. The responsibility for that selection lies with the window manufacturer, installer, specifier or end-user that supplies or fits the device as it is simply not possible for us to replicate the characteristics of all window frame materials (aluminium, PVC, timber etc), the rigidity of the profiles, how the sash interacts with the frame, the radius on the leading edge of the sash, the window manufacturing tolerances of each and every fabricator etc. We can only guarantee that the dead stop functions correctly within the sash gap we specify for the device. End-users should be aware/made aware of the installation requirements, checking & testing of an installation, maintenance and care of the device.

# Product SKU Lookup Table

Dimn A-B Imperial (Thou)	Dimn A-B Metric (Mm)	Product Code
-0.079	-2	XDB 0-1-2
-0.039	-1	
0	0	
0.039	1	DB 12
0.079	2	
0.118	3	M 34
0.157	4	
0.197	5	M 56
0.236	6	
0.276	7	SB 78
0.315	8	
0.354	9	XSB 910
0.394	10	
0.433	11	FB 1112
0.472	12	